

PLEATED BLINDS M


22 MM

Data sheets

P1950



P1950 - Free-hanging slope blind with motor operation

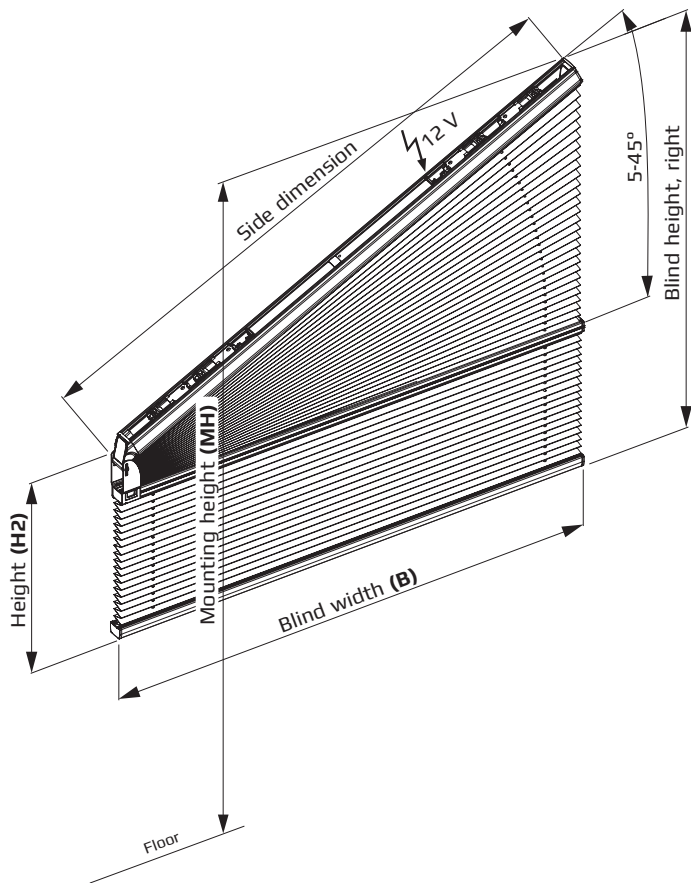

Dimensions/
Pleated blind measures

- **Blind width:** min. 0.30 m
max. depending on the side dimension
- **Side dimension:** max. 2.00 m to 45°
max. 2.20 m to 30°
- **Height (HR or HL):** min. 0.20 m
max. 3.00 m
- **Height H2** min. 0.10 m
max. 2.60 m (Blind width max. 2.20 m)
- **Blind angle:** 5-45°

Gear/Hardware

- Two pleated fabric between three profile rails
- Fabric hangings can be stopped at any position
- Cords made of polyester yarn, Ø1.2 mm
- Plastic parts made from high quality, temperature resistant and abrasion-resistant plastic

Motor data

- **Brel BJE24TR**
Centre drive with integrated brake and minimal noise.
 - Rated voltage: **12 V DC** • Dimension: Ø24 x 320 mm • Connection cable with plug
 - Nominal torque: 2 x 0.6 Nm • Rated speed: 34 min⁻¹ • Power: 8 W
 - Max. current consumption: 0.63 A • Operating temperature: 0 to +40 °C • Protection class: IP20.

Upper rail

- **Width:** 27 mm
- **Height:** 34.5 mm

Center/Lower rail

- **Width:** 22 mm
- **Height:** 16 mm
- Aluminium extruded (Al Mg Si 0.5 F22)
- Hole punch (Ø6.0 mm) equipped with abrasion-resistant plastic cord lugs

Colours

- **Profile rail:** Technically anodized in accordance with E6/EV1 in silver, black (E6-C35) and bronze (E6-C32) or powder-coated in white (RAL 9016), beige (RAL 1015) and dark grey (DB 703)
- Visible **plastic parts** adapted to the profile colours in grey, black, bronze, white, beige or dark grey


Fabric

- Honeycomb fabrics • 25 mm width • invisible drilled hole (Ø3.5 mm) for cord guiding
- Distance between the cords max. 0.90 m (dependent on the fabric)

Mounting


- **Fixing the top rail:** Screw the fastening clip (V2A) directly onto the frame or glazing bead (DIN 7981 Ø3.9 x 16 mm) or screw the fixing bracket (with clip) onto the frame (DIN 7982 Ø3.9 x 13 mm).

Fixing

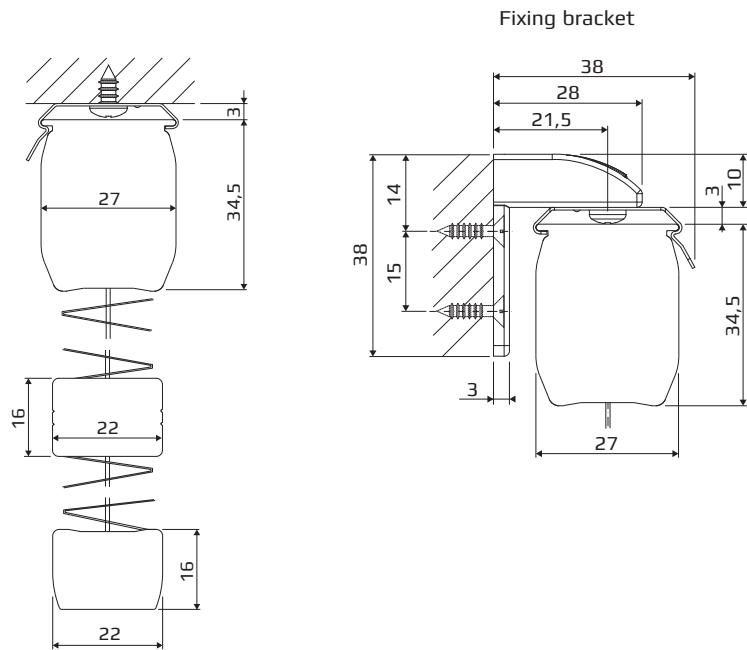


Accessories

Ceiling clip



Fixing bracket





Benthin GmbH
Osterstader Str. 16
D-27572 Bremerhaven
T +49 471 79 84 0
F +49 471 79 84 111
E info@benthin.com

Benthin
11 Brookfield
Duncan Close
Moulton Park
Northampton
NN3 6WL
T +44 1604 490580
F +44 1604 648446
E info-uk@benthin.com

Benthin Systèmes E.U.R.L.
27, Avenue de Montboulon
FR-77165 St. Souplets
T +33 1 60 61 56 56
F +33 1 60 01 57 11
E info@benthin.fr

www.benthin.com